


TEST POINT WITH "DIN 2353" INLINE COUPLING

Light Series / Heavy Series

Test Point Connection M16x2

160 - 630 BAR Rated

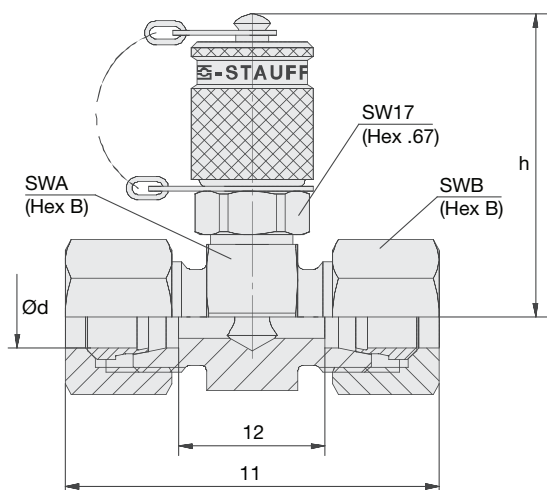

TEST POINTS

Materials

Body	Steel
	316 Stainless Steel - OnRequest
Seal	NITRIL - Others on Request
Temp. Range	-30 To +100°C

Light Series

TUBE O.D.	G	l1	l2	h	SW A	SW B	PN BAR	Article no.
6L	M12 x 1.5	51	21	49	24	14	315	20.40.06
8L	M14 x 1.5	51	21	49	24	17	315	20.40.08
10L	M16 x 1.5	53	23	49	24	19	315	20.40.10
12L	M18 x 1.5	53	23	50.5	27	22	315	20.40.12
15L	M22 x 1.5	55	25	52	30	27	315	20.40.15
18L	M26 x 1.5	57	24	53	32	32	315	20.40.18
22L	M30 x 2	61	28	55	36	36	160	20.40.22
28L	M36 x 2	61	28	57.5	41	41	160	20.40.28
35L	M45 x 2	69	26	60	46	50	160	20.40.35
42L	M52 x 2	71	25	64.5	55	60	160	20.40.42

Heavy Series

TUBE O.D.	G	l1	l2	h	SW A	SW B	PN BAR	Article no.
6S	M14 x 1.5	55	25	49	24	17	630	20.41.06
8S	M16 x 1.5	55	25	49	24	19	630	20.41.08
10S	M18 x 1.5	57	24	49	24	22	630	20.41.10
12S	M20 x 1.5	57	24	49	24	24	630	20.41.12
14S	M22 x 1.5	63	27	50.5	27	27	630	20.41.14
16S	M24 x 1.5	63	26	52	30	30	400	20.41.16
20S	M30 x 2	69	26	55	36	36	400	20.41.20
25S	M36 x 2	75	27	57.5	41	46	400	20.41.28
30S	M42 x 2	81	28	60	46	50	400	20.41.30
38S	M52 x 2	91	29	64.5	55	60	315	20.41.38