

CARBON STEEL PN16 FLANGED BALL VALVE WITH PNEUMATIC ACTUATOR

Fire Safe & Anti-static – API607 / BS6755
Full Bore

Materials

Body	1.4408
Ball	1.4408
Stem Seal	PTFE
Ball Seal	PTFE

Spring Return

Article no.	Size
724904SR	1/2"
724905SR	3/4"
724906SR	1"
724907SR	11/4"
724908SR	11/2"
724910SR	2"
724912SR	21/2"
724914SR	3"
724918SR	4"
724919SR	5"
724920SR	6"
724921SR	8"

PN40 - ON REQUEST

Additional cost for actuators supplied fitted with:



Limit Switch Box page 28

Article no.	
SWBOX	IP67 Standard
SWBOXP	Proximity Switches
SWBOXIS	Intrinsically Safe Box
SWBOXEX	Explosion Proof



Namur Pilot Soleniod Valve page 29

Article no.	
55100229*	Suffix * with A - 220V AC B - 110V AC D - 24V DC

Intrinsically Safe & Explosion Proof also available



PD100 Smart Valve Positioner page 30

Article no.
420100

- 4-20mA input signal &Auto calibration
- Local user interface & LCD display
- Optional features available




IP67 Inductive Proximity Switch page 31

Article no.
IPSFIT

- inductive sensor included (555602)
- target puck included (555422)

Optional 2mtr cable with M12 connector
ECV001

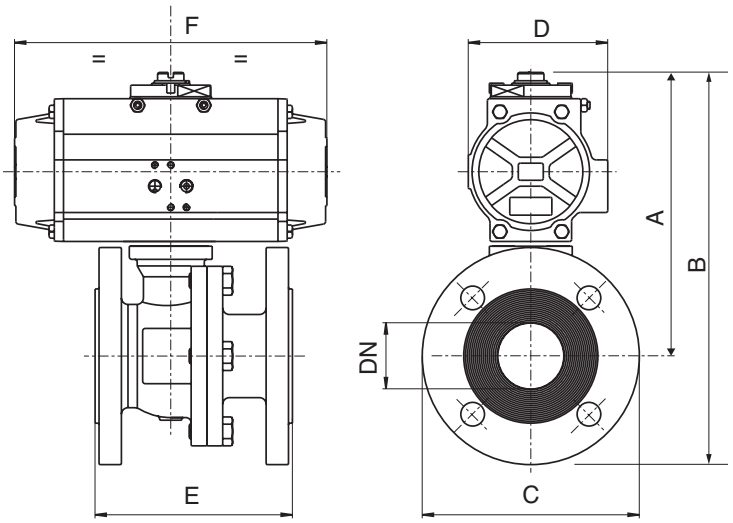

Overall Dimensions - Spring Return

DN PN	15 40	20 40	25 40	32 40	40 40	50 40	65 16	80 16	100 16	150 16	200 16
A	151	156	179	191	196	215	274	284	325	504	553
B	199	209	237	261	271	298	367	384	435	647	723
C	95	105	115	140	150	165	185	200	220	285	340
D	73	73	85	85	85	98	128	128	140	215	215
E	115	120	125	130	140	150	170	180	190	350	400
F	155	155	213	213	213	236	310	310	366	563	563
ACT.	AP2	AP2	AP3	AP3	AP3	AP3.5	AP4.5	AP4.5	AP5	AP8	AP8