

STAINLESS STEEL ANSI 150 FLANGED BALL VALVE WITH PNEUMATIC ACTUATOR


Fire Safe & Anti-static – API607 / BS6755

Full Bore Flanged Ball Valve

Spring Return

Article no.	Size
728504SR	1/2"
728505SR	3/4"
728506SR	1"
728508SR	1 1/2"
728510SR	2"
728514SR	3"
728518SR	4"
728520SR	6"
728521SR	8"

ANSI 300 - ON REQUEST

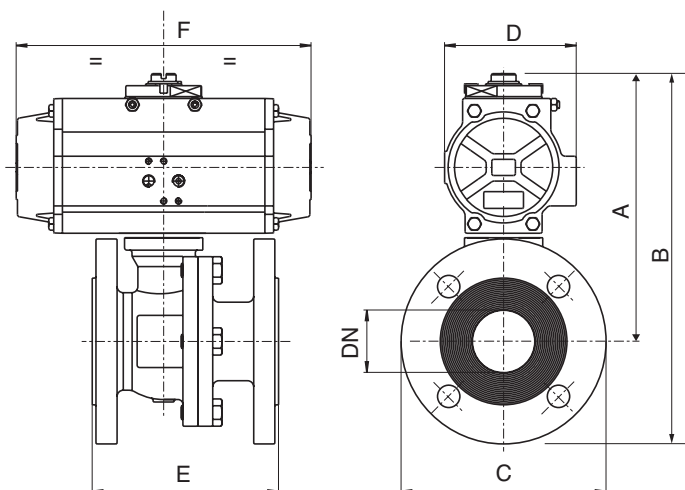

Overall Dimensions - Spring Return

DN	1/2"	3/4"	1"	1 1/2"	2"	2 1/2"	3"	4"	6"	8"
A	152	156	179	196	212	274	284	325	504	553
B	197	206	234	259	287	364	379	440	644	726
C	90	100	110	125	150	180	190	230	280	345
D	73	73	85	85	98	128	128	140	215	215
E	108	117	127	165	178	190	203	229	394	457
F	155	155	213	213	236	310	310	366	563	563
ACT.	AP2	AP2	AP3	AP3	AP3.5	AP4.5	AP4.5	AP5	AP8	AP8



Materials

Body	316 S/S
Ball	316 S/S
Stem Seal	PTFE
Ball Seal	PTFE

PNEUMATIC ACTUATED VALVES

Additional cost for actuators
supplied fitted with:



[Limit Switch Box](#) page 28

Article no.	
SWBOX	IP67 Standard
SWBOXP	Proximity Switches
SWBOXIS	Intrinsically Safe Box
SWBOXEX	Explosion Proof

[Namur Pilot Solenoid Valve](#) page 29



Article no.	
55100229*	Suffix * with A - 220V AC B - 110V AC D - 24V DC

Intrinsically Safe & Explosion Proof also available

[PD100 Smart Valve Positioner](#)
page 30



Article no.	
420100	- 4-20mA input signal & Auto calibration - Local user interface & LCD display - Optional features available

[IP67 Inductive Proximity Switch](#)
page 31



Article no.	
IPSFIT	- inductive sensor included (555602) - target puck included (555422)
Optional 2mtr cable with M12 connector	
ECV001	