

# SV10-23



2 Way, Normally Open, 207 BAR Rated

A solenoid-operated, two-way, poppet-type, normally open, screw-in, hydraulic cartridge valve.

Voltage	Hydraforce code	Article no.
<b>CARTRIDGE VERSION</b>		
24V DC	SV10-23-0-N-24DG	SV1023C24
110V AC	SV10-23-0-N-115AG	SV1023C115
220V AC	SV10-23-0-N-230AG	SV1023C230
<b>INLINE WITH BODY 1/4" BSP</b>		
24V DC	SV10-23-2B-N-24DG	SV10232B24
110V AC	SV10-23-2B-N-115AG	SV10232B110
220V AC	SV10-23-2B-N-230AG	SV10232B230
<b>INLINE WITH BODY 3/8" BSP</b>		
24V DC	SV10-23-3B-N-24DG	SV10233B24
110V AC	SV10-23-3B-N-115AG	SV10233B115
220V AC	SV10-23-3B-N-230AG	SV10233B230
<b>INLINE WITH BODY 1/2" BSP</b>		
24V DC	SV10-23-4B-N-24DG	SV10234B24
110V AC	SV10-23-4B-N-115AG	SV10234B115
220V AC	SV10-23-4B-N-230AG	SV10234B230
<b>with nitril seals</b>		
<b>WITH 'G' DIN CONNECTOR PLUG</b>		

On request - Viton Seals - Screen filter protection - Manual Override  
 On request - For DC coils with spade or push on connections

## Dimensions

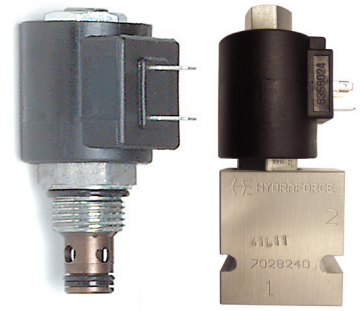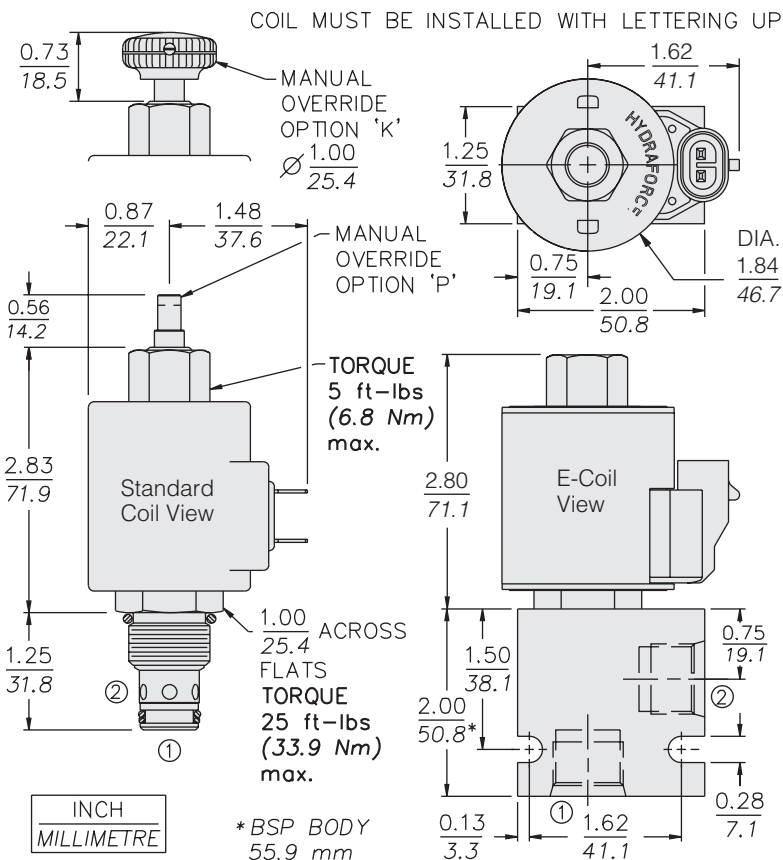

## Materials

### Cartridge:

Weight: 0.16 kg. (0.35 lbs.)  
 Steel with hardened work surfaces.  
 Zinc-plated exposed surfaces.  
 Buna N O-rings and polyester elastomer back-up standard.

### Standard Ported Body:


Weight: 0.16 kg. (0.35 lbs.)  
 Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).  
 Ductile iron bodies available; dimensions may differ.

### Standard Coil:


Weight: 0.27 kg. (0.60 lbs.)  
 Unitized thermoplastic encapsulated.

## Symbols

### USASI:



### ISO:



## Performance (Cartridge Only)

