



# HIPRESS SERIES HIGH PRESSURE BALL VALVE

with Aluminium T Handle  
up to 210 BAR Rated

## Technical Information



Temp. Range	-10 to +80°C
Bore	Reduced
Stem	Anti blow out
Seats	High resistance DELRIN
Upper seal	3 seals 2 anti-friction self-adjusting cone shaped seals, in PTFE - high and medium pressure. 1 O-Ring - low and medium pressure.

Article no.	Size	Max Pressure BAR	Price £	Price €
2321N203	3/8"	210	£44.10	€45.50
2321N204	1/2"	210	£51.10	€52.70
2321N205	3/4"	210	£79.70	€82.20
2321N206	1"	210	£104.20	€107.50

## Materials

Body & Threaded end	CW617N (Pb ≤ 2,2% DIN 50930T6)
Gland	CW617N
Stem	CW617N (Pb ≤ 2,2% DIN 50930T6)
Chromium pl. polished ball	CW617N (Pb ≤ 2,2% DIN 50930T6)
Seats	Acetylic resin
Seats	PTFE
O-ring	FKM (Viton®)
Thandle	aluminium alloy
T handle cover disc	chromium pl. brass sheet
Fixing nut	zinc plated steel
Surface treatment	Nickel plating

## Pressure/Temperature Chart

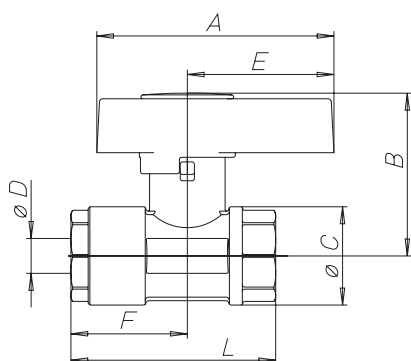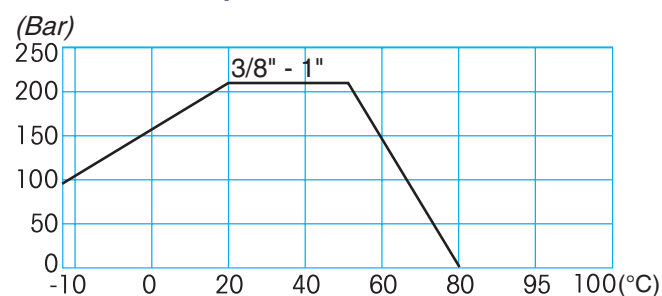

## Dimensions (mm)

Size (in)	3/8"	1/2"	3/4"	1"
Size (mm)	10	15	20	25
ØD bore	8	12	16	20
A	73	73	110	110
B	54	56	75	77
ØC	30	36	45	53
E	43	43	68	68
F	44	47	54	56
L	75	85	95	105
kV	4.15	9.35	16.20	27.70