



STAINLESS STEEL 3 PIECE BALL VALVE WITH PNEUMATIC ACTUATOR DOUBLE ACTING

1,000 PSI Rated - 1/4" - 2"

800 PSI Rated - 2 1/2" - 4"

Materials

Body	CF8M - 316 S/S
Ball	316 S/S
Stem Seal	RTFE
Ball Seal	RTFE

Double Acting

Article no.	Size	Price £	Price €
348190	1/4"	£184.60	€190.40
348191	3/8"	£184.60	€190.40
348192	1/2"	£201.80	€208.10
348193	3/4"	£210.00	€216.60
348194	1"	£256.60	€264.60
348195	1 1/4"	£326.70	€336.90
348196	1 1/2"	£420.40	€433.60
348197	2"	£542.80	€559.80
348198	2 1/2"	£1,002.40	€1,033.70
348199	3"	£1,164.80	€1,201.20
348200	4"	£1,868.60	€1,927.00

Additional cost for actuators supplied fitted with:



Limit Switch Box [page 28](#)

Article no.		Price £	Price €
SWBOX	IP67 Standard	£68.40	€82.10
SWBOXP	Proximity Switches	£265.60	€318.70
SWBOXIS	Intrinsically Safe Box	£265.60	€318.70
SWBOXEX	Explosion Proof	£288.00	€345.60

Namur Pilot Solenoid Valve [page 29](#)



Article no.		Price £	Price €
55100229*	Suffix * with A - 220V AC B - 110V AC D - 24V DC	£105.20	€131.50

Intrinsically Safe & Explosion Proof also available

PD100 Smart Valve Positioner [page 30](#)



Article no.	Price £	Price €
420100	£1,942.90	€2,236.70

- 4-20mA input signal & Auto calibration
- Local user interface & LCD display
- Optional features available

IP67 Inductive Proximity Switch [page 31](#)




Article no.	Price £	Price €
IPSFIT	£283.50	€340.10

- inductive sensor included (555602)
- target puck included (555422)

Optional 2mtr cable with M12 connector

Article no.	Price £	Price €
ECV001	£17.70	€21.20

"NAMUR" connection for solenoid valve

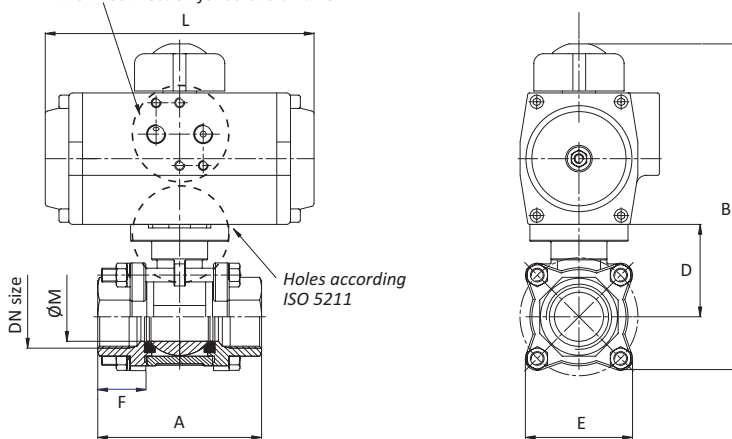

Overall Dimensions - Double Acting

Dia mm	Size ins.	Model	A	B	D	ØE	F	L	ØM	WEIGHT Kg.
8	1/4"	AP0-DA	58	125	36	38	19	110	11.6	0.98
10	3/8"	AP0-DA	58	125	36	38	19	110	12.8	0.98
15	1/2"	AP1-DA	62	150.5	38	41.4	20.1	137	15	1.58
20	3/4"	AP1-DA	77	159.9	41.7	52.4	23.5	137	20	1.96
25	1"	AP1-DA	83	165.1	44.4	57.4	25.5	137	25	2.16
32	1 1/4"	AP2-DA	94	197.4	54	70.8	27.3	150	32	3.37
40	1 1/2"	AP2-DA	107	207.2	59.5	79.4	29.5	150	40	4.07
50	2"	AP3-DA	120	237.5	67	91	34.5	204	50	6.34
65	2 1/2"	AP3.5-DA	157	294.2	101.5	115.4	38	230	65	12.77
80	3"	AP3.5-DA	182	315.4	112.5	135.8	43.5	230	80	16.66