

STAINLESS STEEL 3 PIECE BALL VALVE WITH PNEUMATIC ACTUATOR SPRING RETURN

1,000 PSI Rated - 1/4" - 2"

800 PSI Rated - 2 1/2" - 4"

Spring Return

Article no.	Size	Price £	Price €
348201	1/4"	£224.20	€231.20
348202	3/8"	£224.20	€231.20
348203	1/2"	£224.20	€231.20
348204	3/4"	£263.30	€271.50
348205	1"	£312.20	€321.90
348206	1 1/4"	£391.60	€403.80
348207	1 1/2"	£485.60	€500.80
348208	2"	£638.80	€658.80
348209	2 1/2"	£1,209.90	€1,247.70
348210	3"	£1,602.70	€1,652.80
348211	4"	£2,566.70	€2,646.90



Materials

Body	CF8M - 316 S/S
Ball	316 S/S
Stem Seal	RTFE
Ball Seal	RTFE

Additional cost for actuators supplied fitted with:



Limit Switch Box [page 28](#)

Article no.		Price £	Price €
SWBOX	IP67 Standard	£68.40	€82.10
SWBOXP	Proximity Switches	£265.60	€318.70
SWBOXIS	Intrinsically Safe Box	£265.60	€318.70
SWBOXEX	Explosion Proof	£288.00	€345.60

Namur Pilot Solenoid Valve [page 29](#)



Article no.		Price £	Price €
55100229*	Suffix * with A - 220V AC B - 110V AC D - 24V DC	£105.20	€131.50

Intrinsically Safe & Explosion Proof also available

PD100 Smart Valve Positioner [page 30](#)

Article no.	Price £	Price €
420100	£1,942.90	€2,236.70



- 4-20mA input signal & Auto calibration
- Local user interface & LCD display
- Optional features available

IP67 Inductive Proximity Switch [page 31](#)

Article no.	Price £	Price €
IPSFIT	£283.50	€340.10




- inductive sensor included (555602)
- target puck included (555422)

Optional 2mtr cable with M12 connector

ECV001	£17.70	€21.20
--------	--------	--------

"NAMUR" connection for solenoid valve

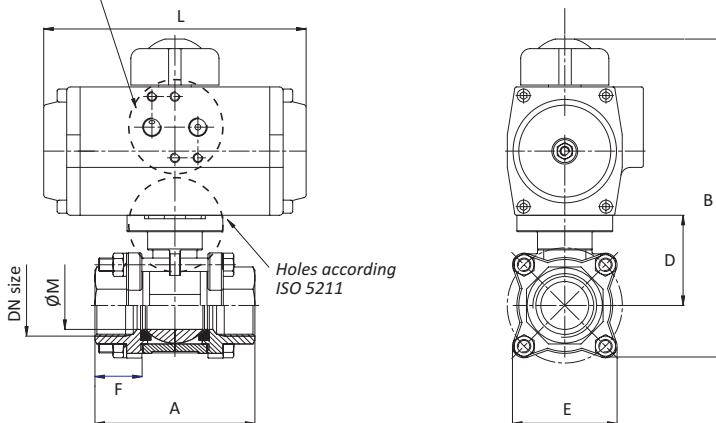

Overall Dimensions - Spring Return

Dia	Size mm ins.	Model	A	B	D	ØE	F	L	ØM	WEIGHT Kg.
8	1/4"	AP1-SR	58	147	36	38	19	137	11.6	1.67
10	3/8"	AP1-SR	58	147	36	38	19	137	12.8	1.67
15	1/2"	AP1-SR	62	150.5	38	41	20.1	137	15	1.70
20	3/4"	AP2-SR	77	175.9	41.7	52.4	23.5	150	20	2.66
25	1"	AP2-SR	83	181.1	44.4	57.4	25.5	150	25	2.86
32	1 1/4"	AP3-SR	94	214.4	54	70.8	27.3	204	32	5.13
40	1 1/2"	AP3-SR	107	224.2	59.5	79.4	29.5	204	40	5.83
50	2"	AP3.5-SR	120	247.5	67	91	34.5	230	50	8.45
65	2 1/2"	AP4.5-SR	157	309.2	101.5	115.4	38	305	65	15.41
80	3"	AP5-SR	182	370.4	112.5	135.8	43.5	360	80	26.53