



SWIVEL ADAPTORS FOR PRESSURE GAUGES

400 BAR Rated

Swivel adaptors allow the connection of pressure gauges direct to the system allowing the gauge to be positioned with the dial in the correct orientation. These adaptors have a built in 'O' ring seal for pressure gauges with sealing nipple to DIN 16288. The oil flow is restricted to the gauge to dampen any pressure shocks (snubber effect).

Materials


Body	Steel 9SMn28K or 316 Stainless Steel
Seal	NITRIL (Others On Request)
Temp. Range	-20 TO +100°C

Carbon Steel

Article No.	Type	Size (Gauge x System)	Price £	Price €
208000	48	1/4" X 1/8" BSPT	£12.70	€13.10
208001	88	1/8" x 1/8" BSPT	£12.70	€13.10
208002	44	1/4" x 1/4" BSPT	£7.60	€7.90
208002p	44p	1/4" x 1/4" BSP	£7.60	€7.90
208003	42	1/4" x 1/2" BSPT	£10.20	€10.50
208004	24	1/2" x 1/4" BSPT	£15.30	€15.70
208005	22	1/2" x 1/2" BSPT	£20.40	€21.00

316 Stainless Steel

Article No.	Type	Size (Gauge x System)	Price £	Price €
94088	44	1/4" x 1/4" BSPT	£55.10	€56.80
94089	42	1/4" x 1/2" BSPT	£57.70	€59.50
94090	24	1/2" x 1/4" BSPT	£73.80	€76.10
94100	22	1/2" x 1/2" BSPT	£73.80	€76.10

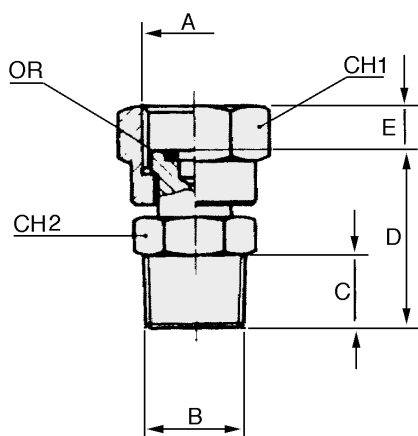

Dimensions

Type	A	B	C	D	E	CH1	CH2	Weight kg
88	1/8"G Parallel	1/8" Taper	9	22	7.5	14	12	0.021
48	1/4"G Parallel	1/8" Taper	9	27	9.5	18	12	0.03
44	1/4"G Parallel	1/4" Parallel*/ Taper	13	27	9.5	18	17	0.040
42	1/4"G Parallel	1/2" Taper	16	31	9.5	18	22	0.068
24	1/2"G Parallel	1/4" Taper	13	31	11	27	22	0.090
22	1/2"G Parallel	1/2" Taper	16	34	11	27	22	0.100

* Parallel thread has 60° internal cone