






PM70 LEVER OPERATED HAND PUMP

Double pumping for single acting cylinder

Article no.	Displacement	Optimal Pressure	Max Pressure	Price £	Price €
PM70	70cm ³	50 BAR	200 BAR	£336.40	€346.60
Rubber Protection				£12.50	€12.90
Relief Valve Option				£21.30	€22.00




Ordering Code

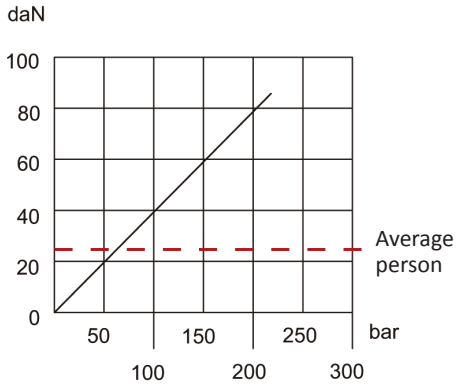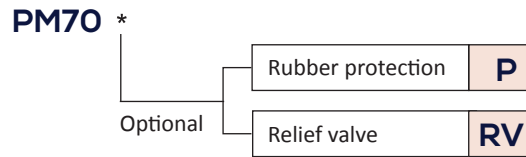

Effort (daN) operating on the end of the lever. Average person will generate 25 daN force.

Technical data

Mineral oil	ISO 6743/4 (DIN 51524)
Oil viscosity	15-250 mm ² /s (15 to 250 cSt)
Max contamination index	ISO 4406:1999 Classe 19/17/14
Oil temperature	-20°C +80°C -4°F + 176°F
Ambient temperature	-20°C +50°C -4°F + 122°F
Weight	5.6kg
It is necessary a filter is used to protect the valve (advised filtration 15 µm)	

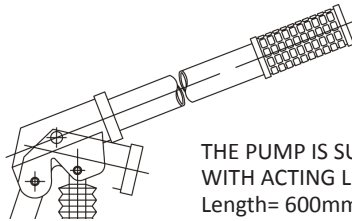

THE PUMP IS SUPPLIED WITH ACTING LEVER
Length= 600mm

Dimensions - mm (in)

