



SP08-20

2 Way, Normally Closed, 207 BAR Rated

A proportional solenoid-operated, two-way, poppet-type, normally closed, screw-in hydraulic cartridge valve for low-leakage blocking and load-holding applications.

Materials

Cartridge:

Weight: 0.09 kg. (0.20 lbs.)
Steel with hardened work surfaces.
Zinc-plated exposed surfaces.
Buna N O-rings and back-ups standard.

Standard Ported Body:

Weight: 0.16 kg. (0.35 lbs.)
Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).
Ductile iron bodies available;
dimensions may differ;




Standard Coil:

Weight: 0.11 kg. (0.25 lbs.)
Unitized thermoplastic encapsulated.

Voltage	Hydraforce code	Article no.	Price £	Price €
CARTRIDGE VERSION				
24V DC	SP08-20-0-N-24DG	SP0820C24	£183.30	€220.00
INLINE WITH BODY 1/4" BSP				
24V DC	SP08-20-2B-N-24DG	SP08202B24	£242.40	€290.90
INLINE WITH BODY 3/8" BSP				
24V DC	SP08-20-3B-N-24DG	SP08203B24	£244.60	€293.50
with nitril seals				
WITH 'G' DIN CONNECTOR PLUG				


On request - Viton Seals - Screen filter protection - Manual Override
On request - For DC coils with spade or push on connections

Performance

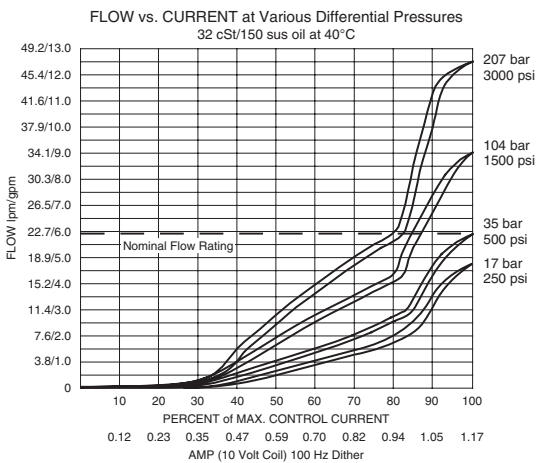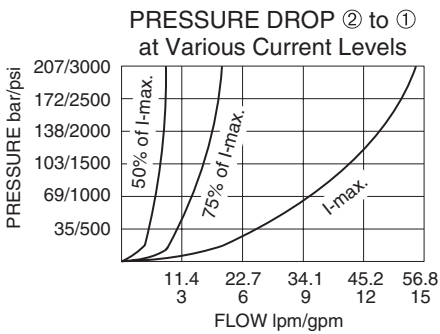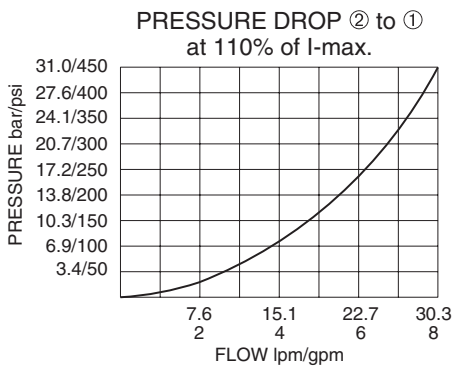


Symbols

USASI/ISO:



Dimensions

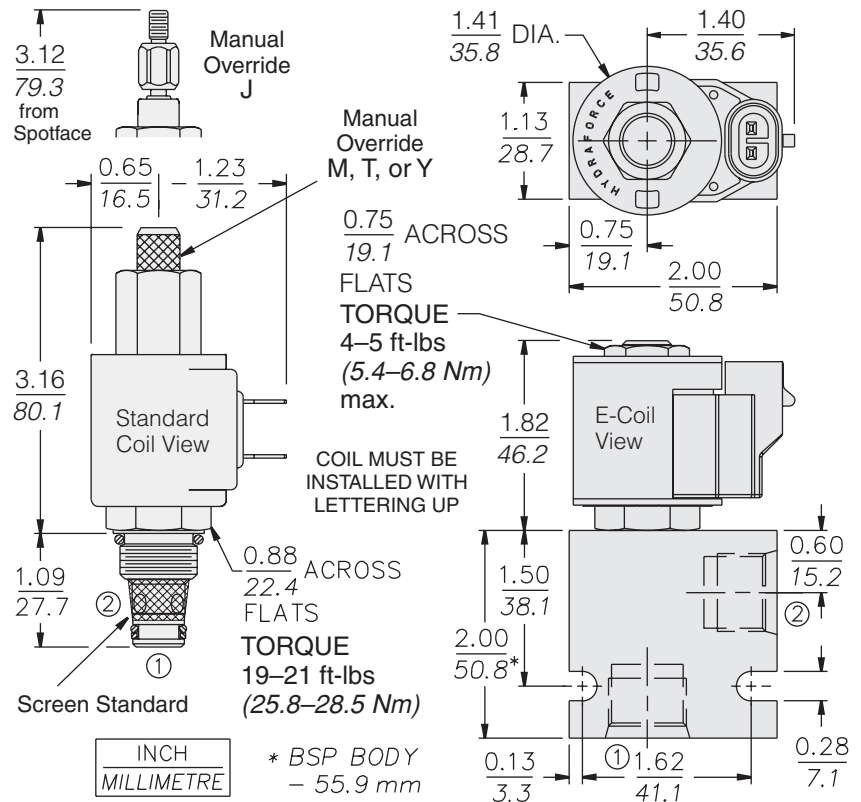

Please contact our technical sales team for electronic controller options