

# SV08-20

2 Way, Normally Closed, 207 BAR Rated

A solenoid-operated, 2-way, normally closed, piloted poppet-type, screw-in hydraulic cartridge valve, intended to act as a blocking or load-holding device for low flow circuits.

### Materials

**Cartridge**  
 Weight: 0.09 kg. (0.20 lbs.)  
 Steel with hardened work surfaces.  
 Zinc-plated exposed surfaces  
 Buna N O-rings and back-ups standard.


**Standard Ported Body**  
 Weight: 0.16 kg. (0.35 lbs.)  
 Anodized highstrength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi)  
 Ductile iron bodies available  
 dimensions may differ.

**Standard Coil**  
 Weight: 0.11 kg. (0.25 lbs.)  
 Unitized thermoplastic encapsulated


Voltage	Hydraforce code	Article no.	Price £	Price €
<b>CARTRIDGE VERSION</b>				
24V DC	SV08-20-0-N-24DG	SV0820C24	£105.90	€127.10
110V AC	SV08-20-0-N-115AG	SV0820C115	£130.80	€157.00
220V AC	SV08-20-0-N-230AG	SV0820C230	£138.20	€135.90
<b>INLINE WITH BODY 1/4" BSP</b>				
24V DC	SV08-20-2B-N-24DG	SV08202B24	£165.00	€197.90
110V AC	SV08-20-2B-N-115AG	SV08202B110	£189.90	€227.90
220V AC	SV08-20-2B-N-230AG	SV08202B230	£197.30	€236.80
<b>INLINE WITH BODY 3/8" BSP</b>				
24V DC	SV08-20-3B-N-24DG	SV08203B24	£167.20	€200.60
110V AC	SV08-20-3B-N-115AG	SV08203B115	£192.10	€230.50
220V AC	SV08-20-3B-N-230AG	SV08203B230	£199.50	€239.40
<b>with nitril seals</b>				
<b>WITH 'G' DIN CONNECTOR PLUG</b>				

On request - Viton Seals - Screen filter protection - Manual Override  
 On request - For DC coils with spade or push on connections


### Symbols

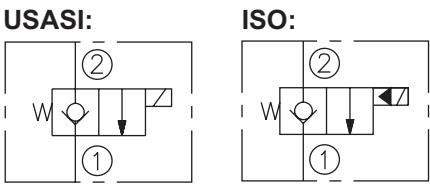

### Performance (Cartridge Only)

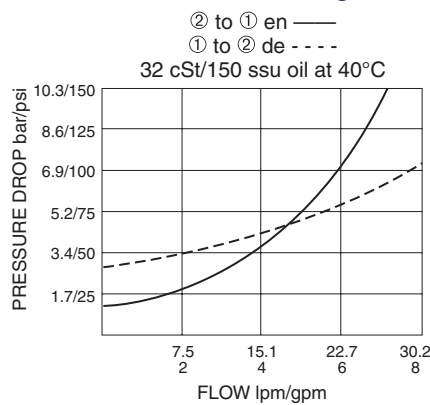

### Dimensions

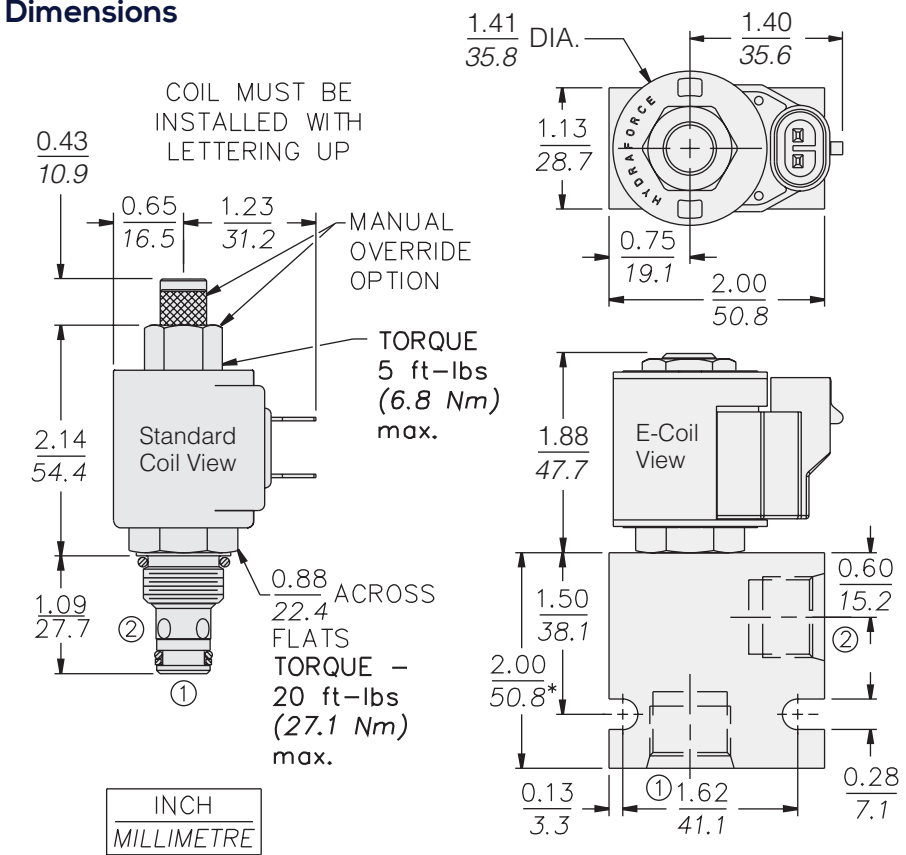

\* BSP BODY - 55.9 mm