


SV08-21

2 Way, Normally Open, 207 BAR Rated

A solenoid-operated, 2-way, piloted, poppet-type, normally open, screw-in, hydraulic cartridge valve designed for low leakage in load-holding applications.

Voltage	Hydraforce code	Article no.	Price £	Price €
CARTRIDGE VERSION				
24V DC	SV08-21-0-N-24DG	SV0821C24	£127.70	€155.30
110V AC	SV08-21-0-N-115AG	SV0821C115	£152.70	€183.20
220V AC	SV08-21-0-N-230AG	SV0821C230	£160.10	€192.20
INLINE WITH BODY 1/4" BSP				
24V DC	SV08-21-2B-N-24DG	SV08212B24	£186.80	€224.20
110V AC	SV08-21-2B-N-115AG	SV08212B110	£211.80	€254.10
220V AC	SV08-21-2B-N-230AG	SV08212B230	£219.20	€263.00
INLINE WITH BODY 3/8" BSP				
24V DC	SV08-21-3B-N-24DG	SV08213B24	£189.00	€226.80
110V AC	SV08-21-3B-N-115AG	SV08213B115	£213.90	€256.70
220V AC	SV08-21-3B-N-230AG	SV08213B230	£221.40	€265.70
with nitril seals				
WITH 'G' DIN CONNECTOR PLUG				

On request - Viton Seals - Screen filter protection - Manual Override
On request - For DC coils with spade or push on connections

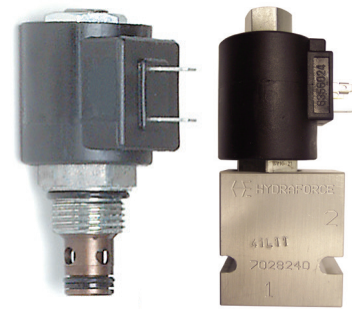

Materials

Cartridge:

Weight: 0.09 kg. (0.20 lbs.)
Steel with hardened work surfaces.
Zinc-plated exposed surfaces.
Buna N O-rings and back-up standard.


Standard Ported Body:

Weight: 0.16 kg. (0.35 lbs.)
Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).
Ductile iron bodies available; dimensions may differ.

Standard Coil:


Weight: 0.11 kg. (0.25 lbs.)
Unitized thermoplastic encapsulated

Dimensions

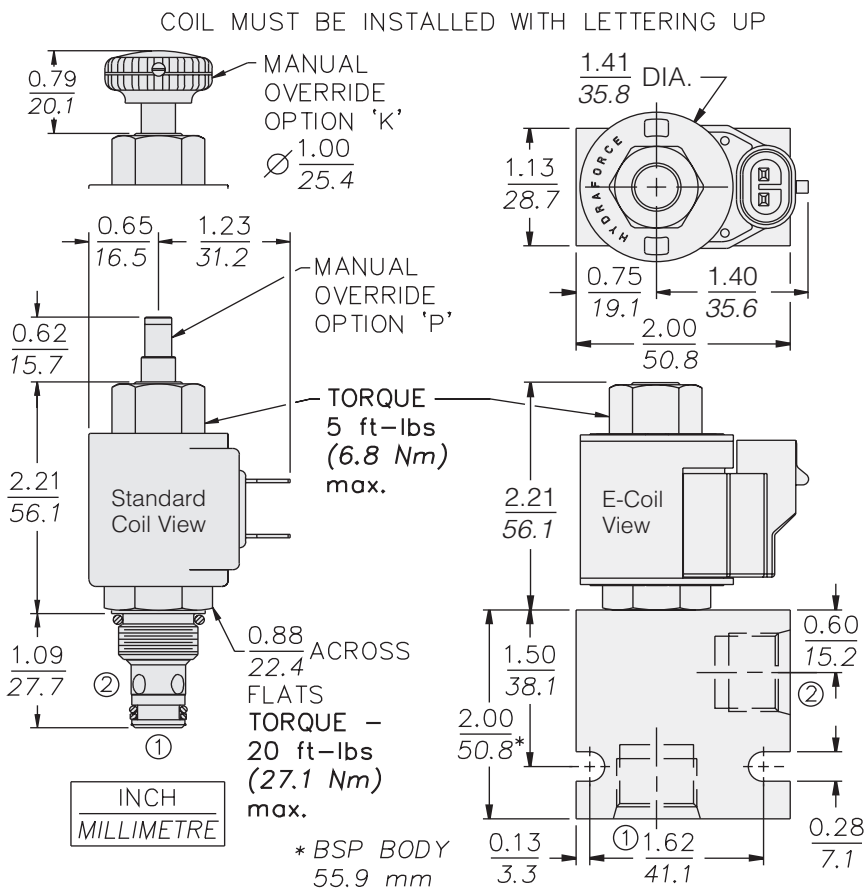


Symbols

USASI:



ISO:



Performance (Cartridge Only)

