

SV08-24

2 Way, Normally Closed, 207 BAR Rated

A solenoid-operated, two-way, normally closed, direct-acting, spool-type, screw-in hydraulic cartridge valve, designed to operate as a bidirectional blocking valve in low flow circuits.

Materials

Cartridge:

Weight: 0.09 kg. (0.20 lbs.);
Steel with hardened work surfaces.
Zinc-plated exposed surfaces;
Buna N O-rings and back-ups
standard.

Standard Ported Body:

Weight: 0.16 kg. (0.35 lbs.); Anodized
high-strength 6061 T6 aluminum
alloy, rated to 207 bar (3000 psi);
Ductile iron bodies available;
dimensions may differ.

Standard Coil:



Weight: 0.11 kg. (0.25 lbs.);
Unitized thermoplastic encapsulated.

Voltage	Hydraforce code	Article no.	Price £	Price €
CARTRIDGE VERSION				
24V DC	SV08-24-0-N-24DG	SV0824C24	£102.40	€122.90
110V AC	SV08-24-0-N-115AG	SV0824C115	£127.30	€152.80
220V AC	SV08-24-0-N-230AG	SV0824C230	£134.80	€161.70
INLINE WITH BODY 1/4" BSP				
24V DC	SV08-24-2B-N-24DG	SV08242B24	£161.40	€193.70
110V AC	SV08-24-2B-N-115AG	SV08242B110	£186.40	€223.70
220V AC	SV08-24-2B-N-230AG	SV08242B230	£193.80	€232.60
INLINE WITH BODY 3/8" BSP				
24V DC	SV08-24-3B-N-24DG	SV08243B24	£163.60	€196.40
110V AC	SV08-24-3B-N-115AG	SV08243B115	£188.60	€226.30
220V AC	SV08-24-3B-N-230AG	SV08243B230	£196.00	€235.20
with nitril seals				
WITH 'G' DIN CONNECTOR PLUG				


On request - Viton Seals - Screen filter protection - Manual Override
On request - For DC coils with spade or push on connections

Symbols


USASI/ISO:



Performance (Cartridge Only)

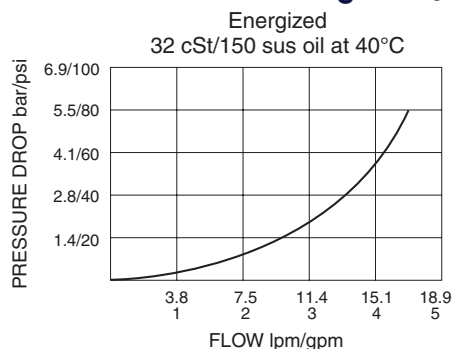

Dimensions

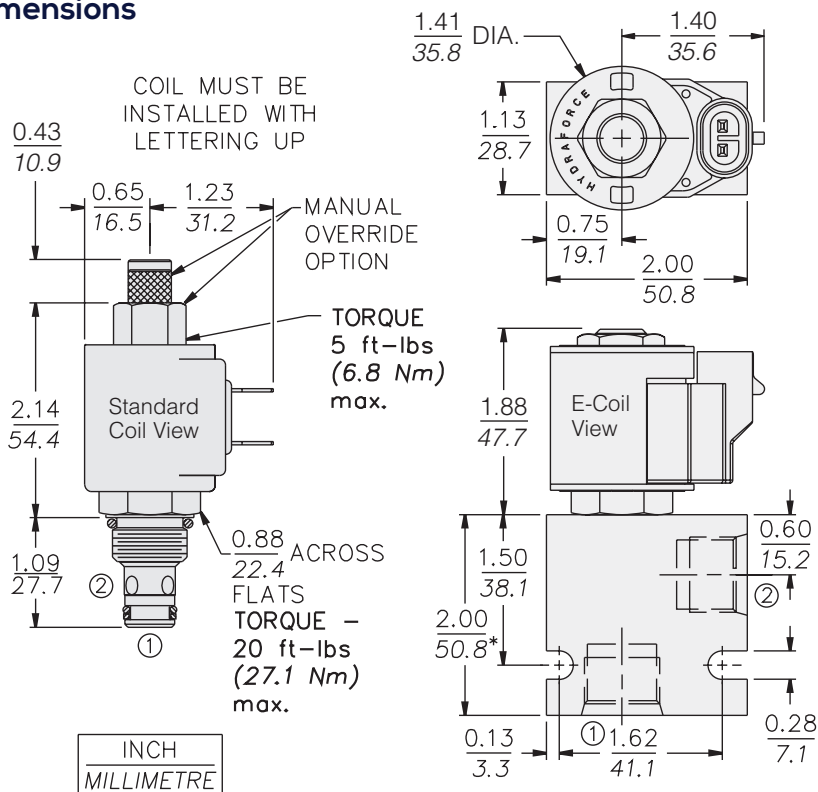

* BSP BODY - 55.9 mm