


# SV08-47B

4 Way, 3 Position, Spool, Open Center, 207 BAR Rated

A solenoid-operated, 4-way, 3-position, direct-acting, spool-type, open center, screw-in hydraulic cartridge valve.

Voltage	Hydraforce code	Article no.	Price £	Price €
<b>CARTRIDGE VERSION</b>				
24V DC	SV08-47B-0-N-24DG	SV0847BC24	£207.80	€249.40
110V AC	SV08-47B-0-N-115AG	SV0847BC115	£257.70	€309.20
220V AC	SV08-47B-0-N-230AG	SV0847BC230	£272.60	€327.10
<b>INLINE WITH BODY 1/4" BSP</b>				
24V DC	SV08-47B-2B-N-24DG	SV0847B2B24	£289.60	€347.60
110V AC	SV08-47B-2B-N-115AG	SV0847B2B110	£339.50	€407.40
220V AC	SV08-47B-2B-N-230AG	SV0847B2B230	£354.40	€425.30
<b>INLINE WITH BODY 3/8" BSP</b>				
24V DC	SV08-47B-3B-N-24DG	SV0847B3B24	£313.30	€375.90
110V AC	SV08-47B-3B-N-115AG	SV0847B3B110	£363.10	€435.80
220V AC	SV08-47B-3B-N-230AG	SV0847B3B230	£378.00	€453.60
<b>with nitril seals</b>				
<b>WITH 'G' DIN CONNECTOR PLUG</b>				

On request - Viton Seals - Screen filter protection - Manual Override  
 On request - For DC coils with spade or push on connections

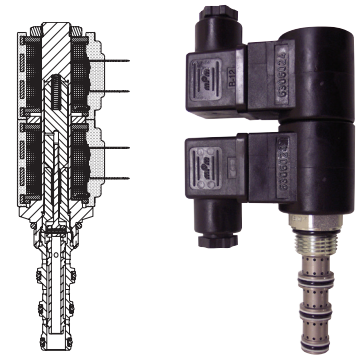

## Materials

### Cartridge:

Weight: 0.13 kg. (0.28 lbs.)  
 Steel with hardened work surfaces.  
 Zinc-plated exposed surfaces.  
 Buna N O-rings and back-ups standard.


### Standard Ported Body:

Weight: 0.27 kg. (0.60 lbs.)  
 Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).  
 Ductile iron bodies available;  
 dimensions may differ.

### Standard Coil:


Weight each: 0.11 kg. (0.25 lbs.)  
 Unitized thermoplastic encapsulated.

## Dimensions

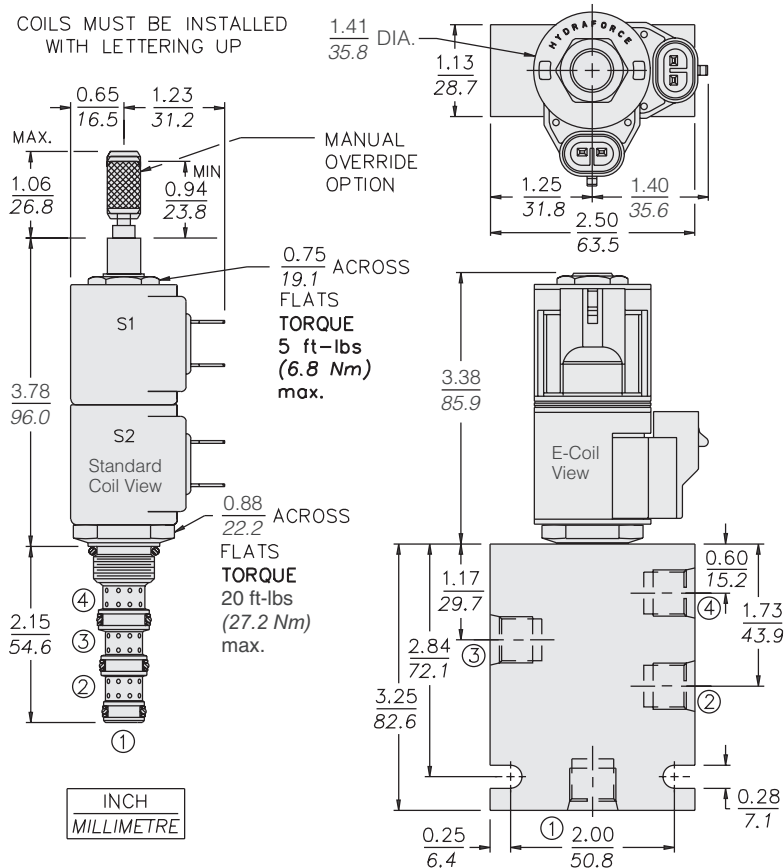


## Symbols

### USASI:



### ISO:



## Performance (Cartridge Only)

