

SV08-47D


4 Way, 3 Position, Motor Spool, 207 BAR Rated

A solenoid-operated, 4-way, 3-position, direct-acting, spool-type, motor spool, screw-in hydraulic cartridge valve.

Voltage	Hydraforce code	Article no.	Price £	Price €
CARTRIDGE VERSION				
24V DC	SV08-47D-0-N-24DG	SV0847DC24	£202.10	€242.60
110V AC	SV08-47D-0-N-115AG	SV0847DC115	£252.00	€302.40
220V AC	SV08-47D-0-N-230AG	SV0847DC230	£266.90	€320.20
INLINE WITH BODY 1/4" BSP				
24V DC	SV08-47D-2B-N-24DG	SV0847D2B24	£283.90	€340.70
110V AC	SV08-47D-2B-N-115AG	SV0847D2B110	£333.80	€400.60
220V AC	SV08-47D-2B-N-230AG	SV0847D2B230	£348.70	€418.40
INLINE WITH BODY 3/8" BSP				
24V DC	SV08-47D-3B-N-24DG	SV0847D3B24	£307.60	€369.10
110V AC	SV08-47D-3B-N-115AG	SV0847D3B110	£357.40	€428.90
220V AC	SV08-47D-3B-N-230AG	SV0847D3B230	£372.30	€446.80

with nitril seals
WITH 'G' DIN CONNECTOR PLUG

On request - Viton Seals - Screen filter protection - Manual Override
On request - For DC coils with spade or push on connections

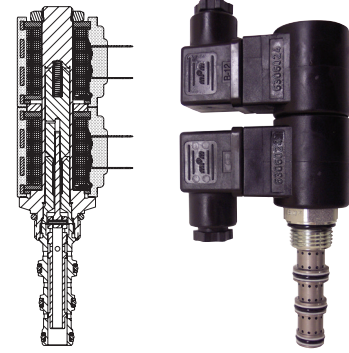

Materials

Cartridge:

Weight: 0.13 kg. (0.28 lbs.)
Steel with hardened work surfaces.
Zinc-plated exposed surfaces.
Buna N O-rings and back-ups standard.


Standard Ported Body:

Weight: 0.27 kg. (0.60 lbs.)
Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi);
Ductile iron bodies available;
dimensions may differ.

Standard Coil:


Weight each: 0.11 kg. (0.25 lbs.)
Unitized thermoplastic encapsulated.

Dimensions

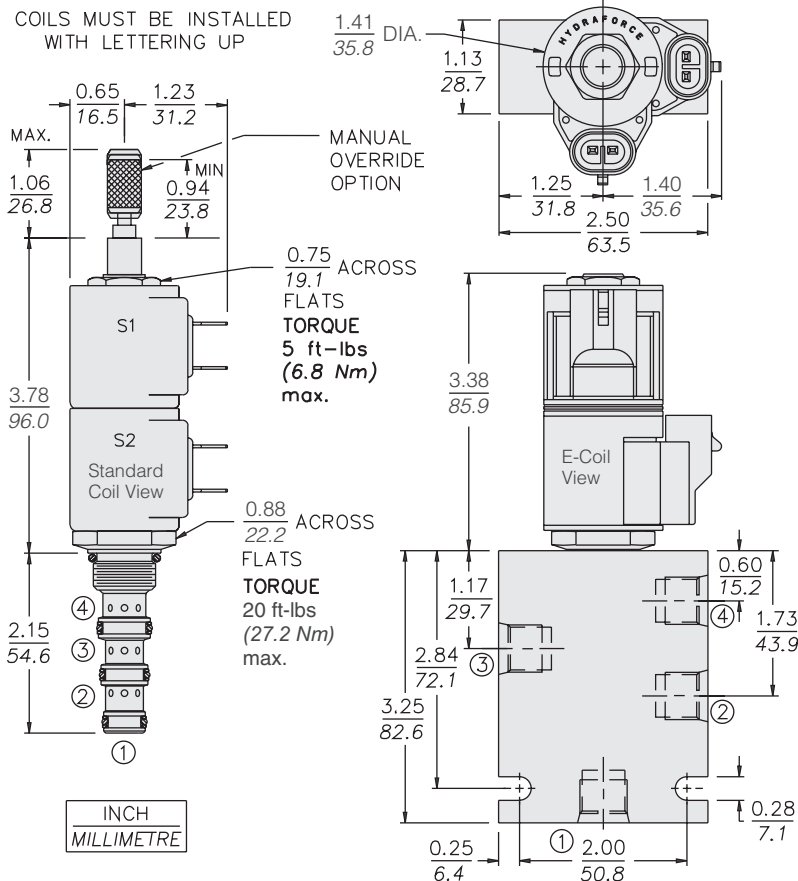


Symbols

USASI:



ISO:



Performance (Cartridge Only)

