

SV10-21

2 Way, Normally Open, 207 BAR Rated


A solenoid-operated, 2-way, piloted, poppet-type, normally open, screw-in, hydraulic cartridge valve designed for low leakage in load-holding applications.

Voltage	Hydraforce code	Article no.	Price £	Price €
CARTRIDGE VERSION				
24V DC	SV10-21-0-N-24DG	SV1021C24	£148.30	€178.00
110V AC	SV10-21-0-N-115AG	SV1021C115	£172.80	€207.40
220V AC	SV10-21-0-N-230AG	SV1021C230	£172.80	€207.40
INLINE WITH BODY 1/4" BSP				
24V DC	SV10-21-2B-N-24DG	SV10212B24	£224.40	€269.30
110V AC	SV10-21-2B-N-115AG	SV10212B110	£248.90	€298.70
220V AC	SV10-21-2B-N-230AG	SV10212B230	£248.90	€298.70
INLINE WITH BODY 3/8" BSP				
24V DC	SV10-21-3B-N-24DG	SV10213B24	£220.90	€265.10
110V AC	SV10-21-3B-N-115AG	SV10213B115	£245.40	€294.50
220V AC	SV10-21-3B-N-230AG	SV10213B230	£245.40	€294.50
INLINE WITH BODY 1/2" BSP				
24V DC	SV10-21-4B-N-24DG	SV10214B24	£209.60	€251.50
110V AC	SV10-21-4B-N-115AG	SV10214B115	£234.10	€280.90
220V AC	SV10-21-4B-N-230AG	SV10214B230	£234.10	€280.90

with nitril seals

WITH 'G' DIN CONNECTOR PLUG

On request - Viton Seals - Screen filter protection - Manual Override
On request - For DC coils with spade or push on connections

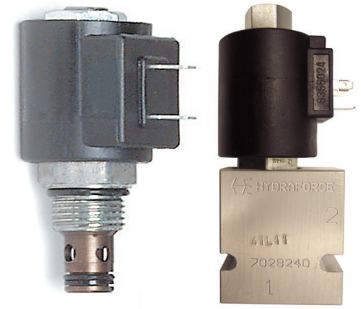

Materials

Cartridge:

Weight: 0.16 kg. (0.35 lbs.)
Steel with hardened work surfaces.
Zinc-plated exposed surfaces.
Buna N O-rings and polyester elastomer back-up standard.


Standard Ported Body:

Weight: 0.16 kg. (0.35 lbs.)
Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).
Ductile iron bodies available; dimensions may differ.

Standard Coil:


Weight: 0.27 kg. (0.60 lbs.)
Unitized thermoplastic encapsulated.

Dimensions

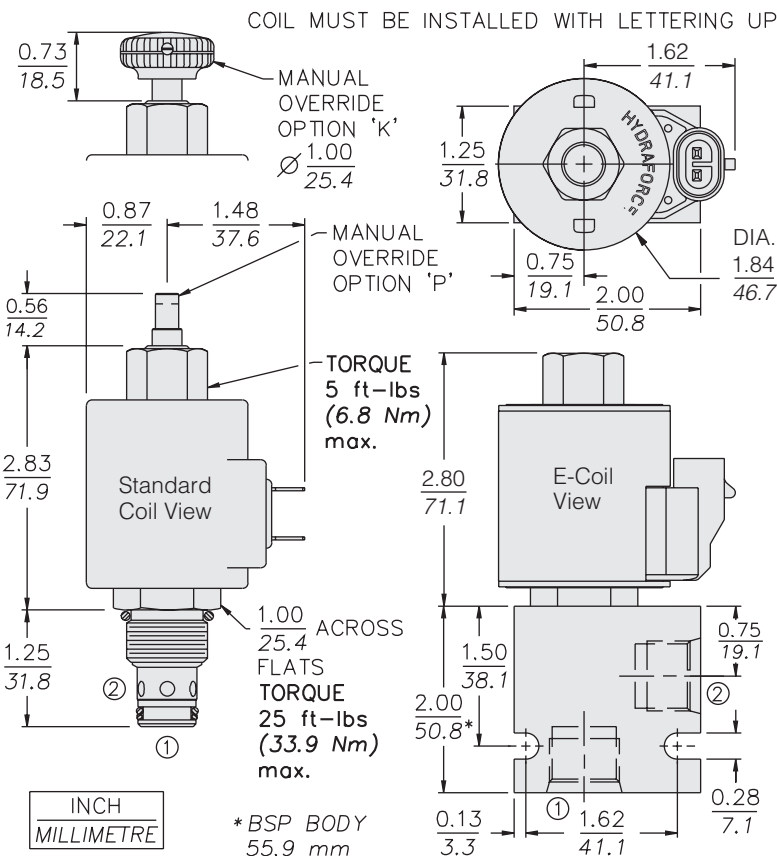


Symbols

USASI:



ISO:



Performance (Cartridge Only)

