

# SV10-22

**2 Way, Normally Closed, 207 BAR Rated**

A solenoid-operated, 2-way, normally closed, poppet-type, screw-in hydraulic cartridge valve, designed for low leakage blocking and load holding applications.

**Materials**

**Cartridge:**  
 Weight: 0.16 kg. (0.35 lbs.)  
 Steel with hardened work surfaces.  
 Zinc-plated exposed surfaces.  
 Buna N O-rings and polyester elastomer back-up standard.

**Standard Ported Body:**  
 Weight: 0.16 kg. (0.35 lbs.)  
 Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).  
 Ductile iron bodies available; dimensions may differ.


**Standard Coil:**  
 Weight: 0.27 kg. (0.60 lbs.)  
 Unitized thermoplastic encapsulated.

Voltage	Hydraforce code	Article no.	Price £	Price €
<b>CARTRIDGE VERSION</b>				
24V DC	SV10-22-0-N-24DG	SV1022C24	£133.90	€160.70
110V AC	SV10-22-0-N-115AG	SV1022C115	£158.40	€190.10
220V AC	SV10-22-0-N-230AG	SV1022C230	£158.40	€190.10
<b>INLINE WITH BODY 1/4" BSP</b>				
24V DC	SV10-22-2B-N-24DG	SV1022B24	£210.00	€252.00
110V AC	SV10-22-2B-N-115AG	SV1022B110	£234.50	€281.40
220V AC	SV10-22-2B-N-230AG	SV1022B230	£234.50	€281.40
<b>INLINE WITH BODY 3/8" BSP</b>				
24V DC	SV10-22-3B-N-24DG	SV1022B24	£206.50	€247.80
110V AC	SV10-22-3B-N-115AG	SV1022B115	£231.00	€277.20
220V AC	SV10-22-3B-N-230AG	SV1022B230	£231.00	€277.20
<b>INLINE WITH BODY 1/2" BSP</b>				
24V DC	SV10-22-4B-N-24DG	SV1022B24	£195.10	€234.20
110V AC	SV10-22-4B-N-115AG	SV1022B115	£219.60	€263.60
220V AC	SV10-22-4B-N-230AG	SV1022B230	£219.60	€263.60



with nitril seals  
**WITH 'G' DIN CONNECTOR PLUG**

On request - Viton Seals - Screen filter protection - Manual Override  
 On request - For DC coils with spade or push on connections

## Symbols

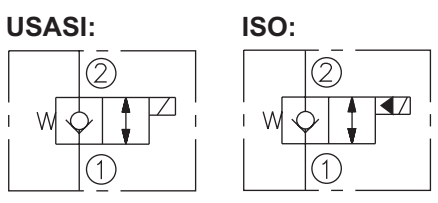

## Performance (Cartridge Only)

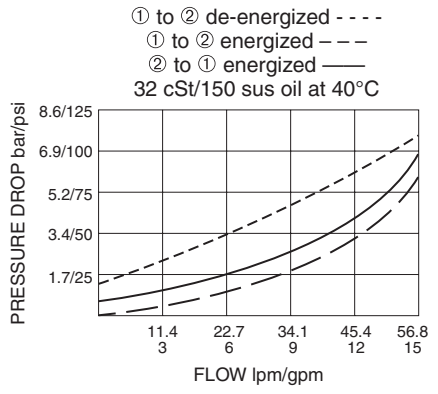

## Dimensions

