

SV10-23



2 Way, Normally Open, 207 BAR Rated

A solenoid-operated, two-way, poppet-type, normally open, screw-in, hydraulic cartridge valve.

Voltage	Hydraforce code	Article no.	Price £	Price €
CARTRIDGE VERSION				
24V DC	SV10-23-0-N-24DG	SV1023C24	£153.60	€184.30
110V AC	SV10-23-0-N-115AG	SV1023C115	£178.10	€213.70
220V AC	SV10-23-0-N-230AG	SV1023C230	£178.10	€213.70
INLINE WITH BODY 1/4" BSP				
24V DC	SV10-23-2B-N-24DG	SV10232B24	£229.70	€275.60
110V AC	SV10-23-2B-N-115AG	SV10232B110	£254.20	€305.00
220V AC	SV10-23-2B-N-230AG	SV10232B230	£254.20	€305.00
INLINE WITH BODY 3/8" BSP				
24V DC	SV10-23-3B-N-24DG	SV10233B24	£226.20	€271.40
110V AC	SV10-23-3B-N-115AG	SV10233B115	£250.70	€300.80
220V AC	SV10-23-3B-N-230AG	SV10233B230	£250.70	€300.80
INLINE WITH BODY 1/2" BSP				
24V DC	SV10-23-4B-N-24DG	SV10234B24	£214.80	€257.80
110V AC	SV10-23-4B-N-115AG	SV10234B115	£239.30	€287.20
220V AC	SV10-23-4B-N-230AG	SV10234B230	£239.30	€287.20
with nitril seals				
WITH 'G' DIN CONNECTOR PLUG				

On request - Viton Seals - Screen filter protection - Manual Override
On request - For DC coils with spade or push on connections

Dimensions

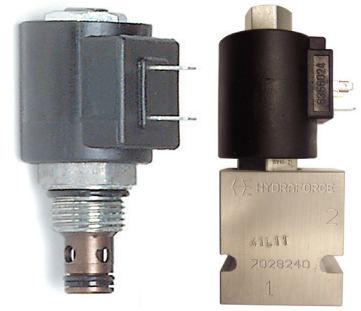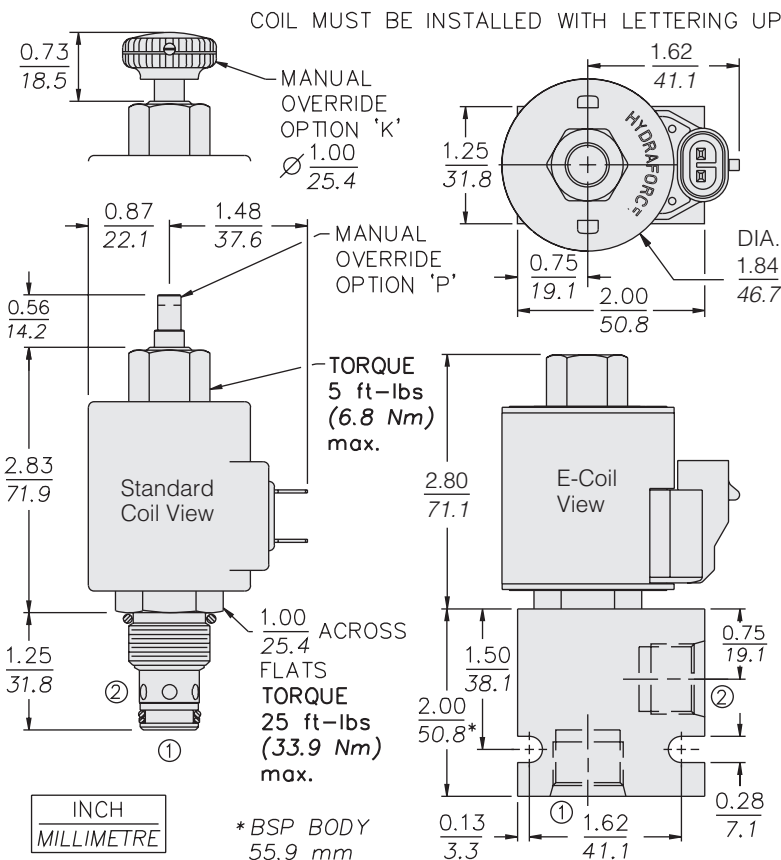

Materials

Cartridge:

Weight: 0.16 kg. (0.35 lbs.)
Steel with hardened work surfaces.
Zinc-plated exposed surfaces.
Buna N O-rings and polyester elastomer back-up standard.

Standard Ported Body:


Weight: 0.16 kg. (0.35 lbs.)
Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).
Ductile iron bodies available; dimensions may differ.

Standard Coil:


Weight: 0.27 kg. (0.60 lbs.)
Unitized thermoplastic encapsulated.

Symbols

USASI:



ISO:



Performance (Cartridge Only)

