

SV10-25



2 Way, Normally Open, 207 BAR Rated

A solenoid-operated, two-way, normally open, direct-acting, spool-type, screw-in hydraulic cartridge valve, designed to function as a bidirectional blocking valve.

Voltage	Hydraforce code	Article no.	Price £	Price €
CARTRIDGE VERSION				
24V DC	SV10-25-0-N-24DG	SV1025C24	£129.10	€154.90
110V AC	SV10-25-0-N-115AG	SV1025C115	£153.60	€184.30
220V AC	SV10-25-0-N-230AG	SV1025C230	£153.60	€184.30
INLINE WITH BODY 1/4" BSP				
24V DC	SV10-25-2B-N-24DG	SV10252B24	£205.20	€246.20
110V AC	SV10-25-2B-N-115AG	SV10252B110	£229.70	€275.60
220V AC	SV10-25-2B-N-230AG	SV10252B230	£229.70	€275.60
INLINE WITH BODY 3/8" BSP				
24V DC	SV10-25-3B-N-24DG	SV10253B24	£201.70	€242.00
110V AC	SV10-25-3B-N-115AG	SV10253B115	£226.20	€271.40
220V AC	SV10-25-3B-N-230AG	SV10253B230	£226.20	€271.40
INLINE WITH BODY 1/2" BSP				
24V DC	SV10-25-4B-N-24DG	SV10254B24	£190.30	€228.40
110V AC	SV10-25-4B-N-115AG	SV10254B115	£214.80	€257.80
220V AC	SV10-25-4B-N-230AG	SV10254B230	£214.80	€257.80
with nitril seals				
WITH 'G' DIN CONNECTOR PLUG				

On request - Viton Seals - Screen filter protection - Manual Override
 On request - For DC coils with spade or push on connections

Dimensions

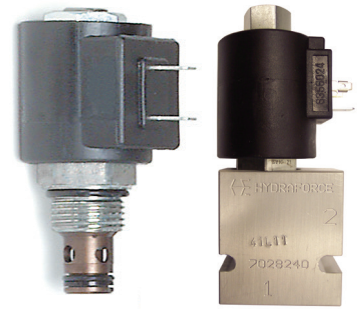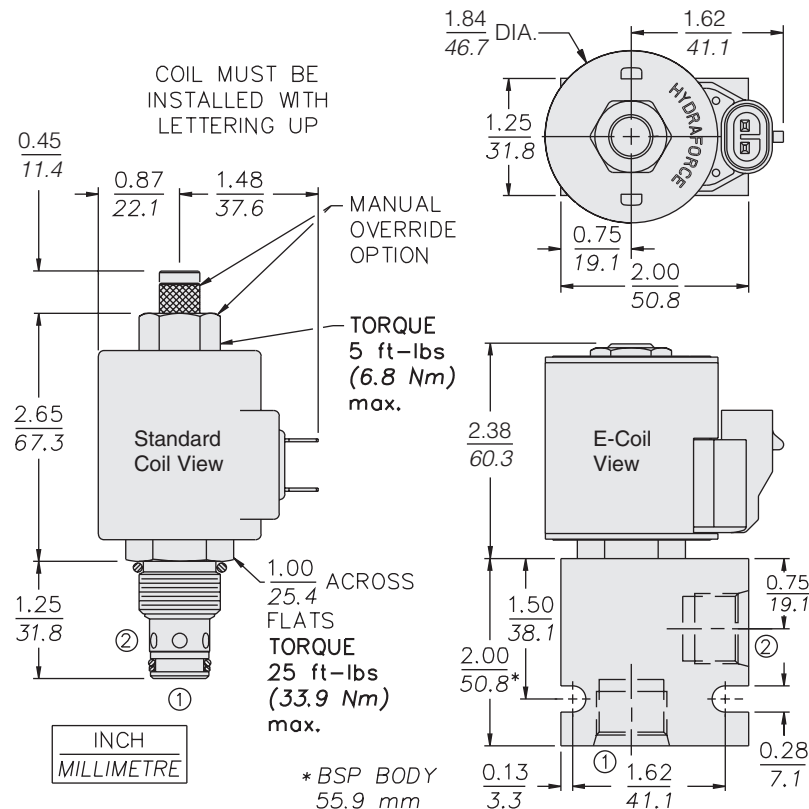

Materials

Cartridge:

Weight: 0.16 kg. (0.35 lbs.)
 Steel with hardened work surfaces. Zinc-plated exposed surfaces.
 Buna N O-rings and polyester elastomer back-up standard.

Standard Ported Body:


Weight: 0.16 kg. (0.35 lbs.)
 Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).
 Ductile iron bodies available; dimensions may differ.

Standard Coil:

Weight: 0.27 kg. (0.60 lbs.)
 Unitized thermoplastic encapsulated.

Symbols

USASI/ISO:



Performance (Cartridge Only)

