


SV10-29

2 Way, Normally Open, 207 BAR Rated

A solenoid-operated, 2-way, normally open, internally piloted, poppet-type, bi-directional blocking, screw-in hydraulic cartridge valve, designed for low leakage in load-holding applications.

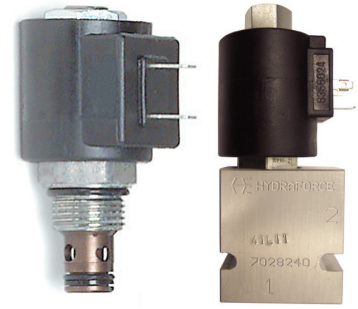

Voltage	Hydraforce code	Article no.	Price £	Price €
CARTRIDGE VERSION				
24V DC	SV10-29-0-N-24DG	SV1029C24	£199.10	€238.90
110V AC	SV10-29-0-N-115AG	SV1029C115	£223.60	€268.30
220V AC	SV10-29-0-N-230AG	SV1029C230	£223.60	€268.30
INLINE WITH BODY 1/4" BSP				
24V DC	SV10-29-2B-N-24DG	SV10292B24	£275.20	€330.20
110V AC	SV10-29-2B-N-115AG	SV10292B110	£299.70	€359.60
220V AC	SV10-29-2B-N-230AG	SV10292B230	£299.70	€359.60
INLINE WITH BODY 3/8" BSP				
24V DC	SV10-29-3B-N-24DG	SV10293B24	£271.70	€326.00
110V AC	SV10-29-3B-N-115AG	SV10293B115	£296.20	€355.40
220V AC	SV10-29-3B-N-230AG	SV10293B230	£296.20	€355.40
INLINE WITH BODY 1/2" BSP				
24V DC	SV10-29-4B-N-24DG	SV10294B24	£260.30	€312.40
110V AC	SV10-29-4B-N-115AG	SV10294B115	£284.80	€341.80
220V AC	SV10-29-4B-N-230AG	SV10294B230	£284.80	€341.80
with nitril seals				
WITH 'G' DIN CONNECTOR PLUG				

On request - Viton Seals - Screen filter protection - Manual Override
On request - For DC coils with spade or push on connections

Materials

Cartridge:

Weight: 0.16 kg. (0.35 lbs.)
Steel with hardened work surfaces. Zinc-plated exposed surfaces.
Buna N O-rings and polyester elastomer back-up standard.


Standard Ported Body:

Weight: 0.16 kg. (0.35 lbs.)
Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).
Ductile iron bodies available; dimensions may differ.

Standard Coil:


Weight: 0.27 kg. (0.60 lbs.)
Unitized thermoplastic encapsulated,

Dimensions

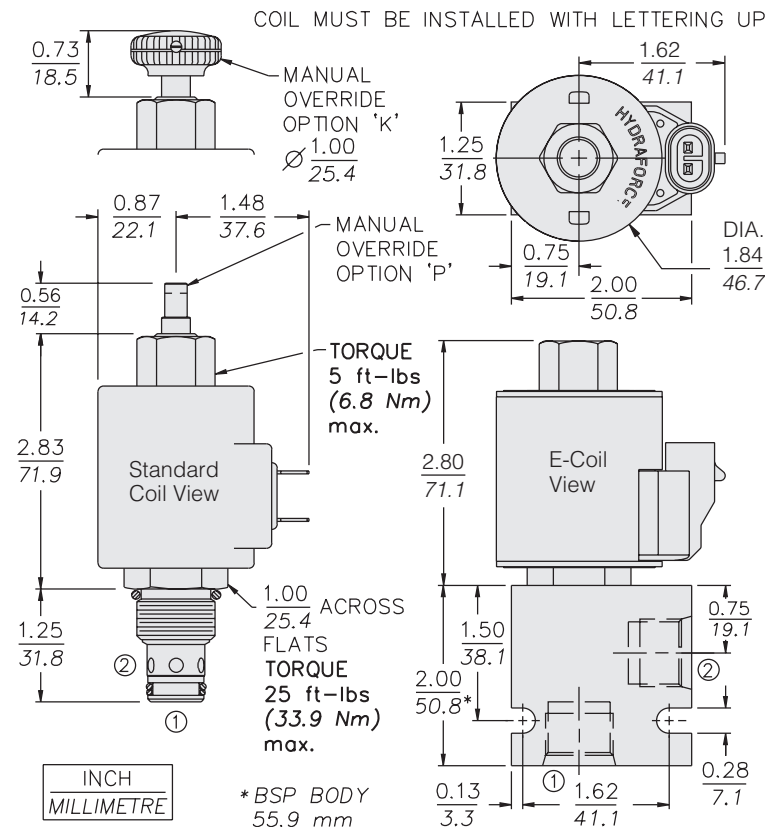


Symbols

USASI/ISO:



ISO:



Performance (Cartridge Only)

