

# SV10-41

4 Way, 2 Position, Spool, 207 BAR Rated

A solenoid-operated, 4-way, 2-position, direct-acting, spool-type, screw-in hydraulic cartridge valve.

## Materials

### Cartridge:

Weight: 0.20 kg. (0.45 lbs.)  
 Steel with hardened work surfaces.  
 Zinc-plated exposed surfaces.  
 Buna N O-rings and polyester elastomer back-up standard.

### Standard Ported Body:

Weight: 0.36 kg. (0.80 lbs.)  
 Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).  
 Ductile iron bodies available; dimensions may differ.

### Standard Coil:


Weight: 0.27 kg. (0.60 lbs.)  
 Unitized thermoplastic encapsulated.

Voltage	Hydraforce code	Article no.	Price £	Price €
<b>CARTRIDGE VERSION</b>				
24V DC	SV10-41-0-N-24DG	SV1041C24	£146.60	€175.90
110V AC	SV10-41-0-N-115AG	SV1041C115	£171.10	€205.30
220V AC	SV10-41-0-N-230AG	SV1041C230	£171.10	€205.30
<b>INLINE WITH BODY 1/4" BSP</b>				
24V DC	SV10-41-2B-N-24DG	SV10412B24	£236.70	€284.00
110V AC	SV10-41-2B-N-115AG	SV10412B110	£261.20	€313.40
220V AC	SV10-41-2B-N-230AG	SV10412B230	£261.20	€313.40
<b>INLINE WITH BODY 3/8" BSP</b>				
24V DC	SV10-41-3B-N-24DG	SV10413B24	£230.60	€276.70
110V AC	SV10-41-3B-N-115AG	SV10413B110	£255.10	€306.10
220V AC	SV10-41-3B-N-230AG	SV10413B230	£255.10	€306.10
<b>with nitril seals</b>				
<b>WITH 'G' DIN CONNECTOR PLUG</b>				


On request - Viton Seals - Screen filter protection - Manual Override  
 On request - For DC coils with spade or push on connections

## Symbols

### USASI/ISO:



## Performance (Cartridge Only)

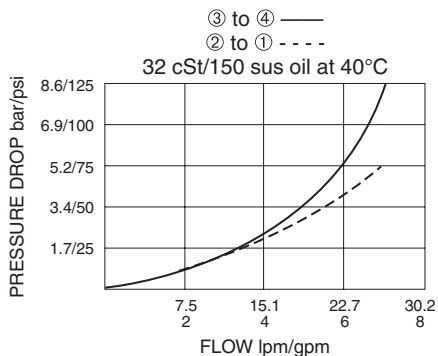

## Dimensions

