



# SV10-47D

**4 Way, 3 Position, Motor Spool, Closed Center, 207 BAR Rated**

A solenoid-operated, 4-way, 3-position, direct-acting, spool-type, motor spool, screw-in hydraulic cartridge valve.

## Materials

### Cartridge:

Weight: 0.30 kg. (0.65 lbs.)  
Steel with hardened work surfaces.  
Zinc-plated exposed surfaces.  
Buna N O-rings and back-ups standard.

### Standard Ported Body:

Weight: 0.36 kg. (0.80 lbs.)  
Anodized high-strength 6061 T6 aluminum alloy, rated to 207 bar (3000 psi).  
Ductile iron bodies available; dimensions may differ.

### Standard Coil:


Weight each: 0.27 kg. (0.60 lbs.)  
Unitized thermoplastic encapsulated.

Voltage	Hydraforce code	Article no.	Price £	Price €
<b>CARTRIDGE VERSION</b>				
24V DC	SV10-47D-0-N-24DG	SV1047DC24	£251.60	€301.90
110V AC	SV10-47D-0-N-115AG	SV1047DC115	£300.60	€360.70
220V AC	SV10-47D-0-N-230AG	SV1047DC230	£300.60	€360.70
<b>INLINE WITH BODY 1/4" BSP</b>				
24V DC	SV10-47D-2B-N-24DG	SV1047D2B24	£341.70	€410.00
110V AC	SV10-47D-2B-N-115AG	SV1047D2B110	£390.70	€468.80
220V AC	SV10-47D-2B-N-230AG	SV1047D2B230	£390.70	€468.80
<b>INLINE WITH BODY 3/8" BSP</b>				
24V DC	SV10-47D-3B-N-24DG	SV1047D3B24	£335.60	€402.70
110V AC	SV10-47D-3B-N-115AG	SV1047D3B110	£405.60	€486.70
220V AC	SV10-47D-3B-N-230AG	SV1047D3B230	£405.60	€486.70
<b>with nitril seals</b>				
<b>WITH 'G' DIN CONNECTOR PLUG</b>				


On request - Viton Seals - Screen filter protection - Manual Override  
On request - For DC coils with spade or push on connections

## Symbols


### USASI:



### ISO:



## Performance (Cartridge Only)

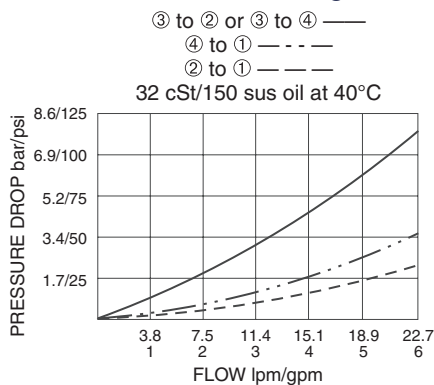

## Dimensions

