


Serie **WAFER ANSI150**Articolo **720006****STAILESS STEEL**

Full bore flanged ball valve ANSI 150 metric.

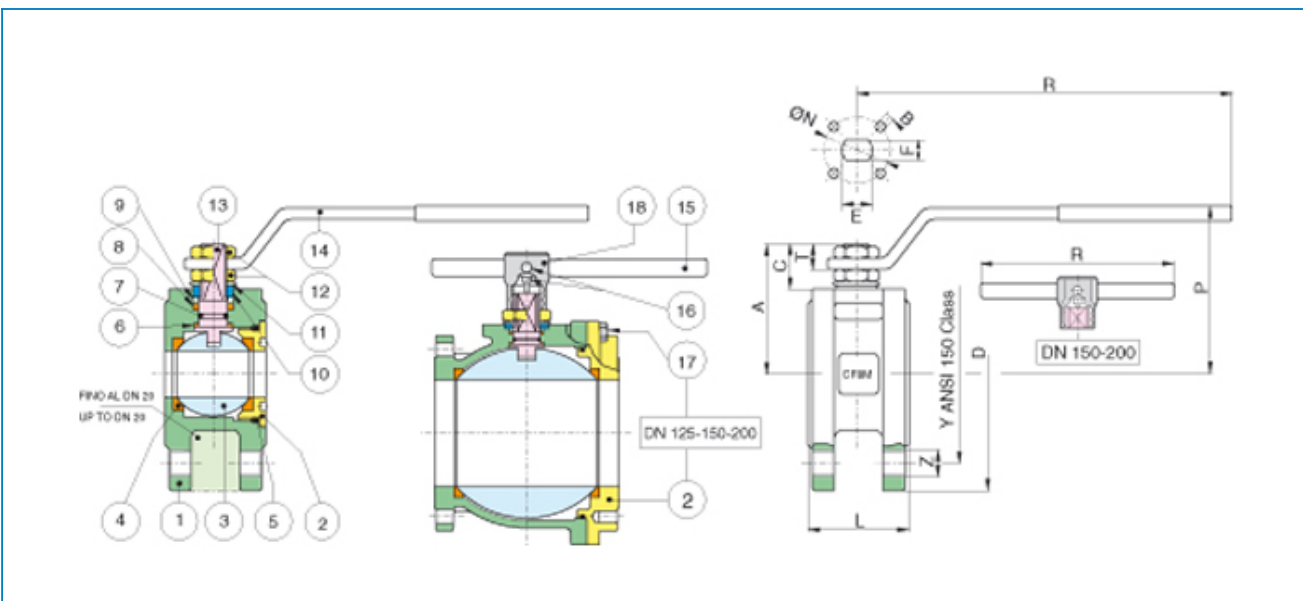

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

| POS. | PART NAME | MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL | N°P |
|------|------------------------|---|------|
| 1 | BODY | A351-CF8M / A182-F316 | 1 |
| 2 | END CONNECTION | A351-CF8M / A182-F316 | 1 |
| 3 | BALL | A351-CF8M / A182-F316 | 1 |
| 4 | BALL SEAT | P.T.F.E. | 2 |
| 5 | O-RING | FKM (VITON®) | 1 |
| 6 | THRUST WASHER | P.T.F.E. | 1 |
| 7 | O-RING | FKM (VITON®) | 1 |
| 8 | STEM SEAT | P.T.F.E. | 1 |
| 9 | PACKING GLAND | CARBON STEEL | 1 |
| 10 | END STOP | INOX AISI 430 (DN15 - DN50) CARBON STEEL DN65 - DN150 | 2-1 |
| 11 | SPRING WASHER | CARBON STEEL | 2 |
| 12 | NUT | CARBON STEEL | 2 |
| 13 | STEM | A182-F316 | 1 |
| 14 | HANDLE | CARBON STEEL | 1 |
| 15 | LEVA DN150-200 | PALANCA DN 150-200 | 1 |
| 16 | SCREW | CARBON STEEL | 1 |
| 17 | SCREW | CARBON STEEL | 8-12 |
| 18 | BODY HANDLE DN 150-200 | EN-GJL-250 | 1 |

| MISURA SIZE | DN | D | Y | Z | L | R | P | A | C | T | E | F | ØN | B | Kv | PN | Kg |
|-------------|-----|-----|-------|---------|------|-----|-----|-------|------|----|----|----|-----|---------|--------|----|--------|
| 1/2" | 15 | 90 | 61 | 4 X M14 | 35 | 131 | 65 | 47 | 15,5 | 9 | 10 | 7 | 32 | 4 X M5 | 19,2 | 20 | 1,30 |
| 3/4" | 20 | 100 | 70 | 4 X M14 | 40 | 131 | 69 | 51,5 | 15,5 | 9 | 10 | 7 | 32 | 4 X M5 | 35,0 | 20 | 1,80 |
| 1" | 25 | 110 | 80 | 4 X M14 | 46 | 174 | 80 | 61 | 17 | 11 | 12 | 8 | 42 | 4 X M5 | 64,5 | 20 | 2,20 |
| 1"1/4 | 32 | 118 | 89 | 4 X M14 | 54 | 174 | 84 | 64,5 | 15 | 11 | 12 | 8 | 42 | 4 X M5 | 103,8 | 20 | 3,30 |
| 1"1/2 | 40 | 127 | 99 | 4 X M14 | 63,5 | 250 | 102 | 78 | 24,5 | 13 | 16 | 10 | 50 | 4 X M6 | 174,0 | 20 | 3,30 |
| 2" | 50 | 150 | 121 | 4 X M16 | 82 | 250 | 111 | 87 | 25 | 13 | 16 | 10 | 50 | 4 X M6 | 301,3 | 20 | 5,50 |
| 2"1/2 | 65 | 175 | 140 | 4 X M16 | 103 | 321 | 128 | 104,5 | 25 | 18 | 20 | 14 | 70 | 4 X M8 | 545,7 | 20 | 9,60 |
| 3" | 80 | 190 | 153 | 4 X M16 | 122 | 321 | 138 | 115 | 28,5 | 18 | 20 | 14 | 70 | 4 X M8 | 872,5 | 20 | 12,80 |
| 4" | 100 | 220 | 191 | 8 X M16 | 152 | 381 | 156 | 137 | 34,5 | 22 | 24 | 18 | 102 | 4 X M10 | 1363,3 | 20 | 21,10 |
| 5" | 125 | 250 | 216 | 8 X M20 | 196 | 381 | 178 | 159 | 34 | 22 | 24 | 18 | 102 | 4 X M10 | 2360,3 | 20 | 37,50 |
| 6" | 150 | 280 | 242 | 8 X M20 | 232 | 700 | 266 | 201,5 | 51,5 | 30 | 42 | 30 | 125 | 4 X M12 | 3671,1 | 20 | 46,10 |
| 8" | 200 | 345 | 298,5 | 8 X Ø22 | 457 | 700 | 332 | 288 | 68 | 28 | 42 | 30 | 125 | 4 X M12 | 6816,6 | 20 | 124,00 |