




CARBON STEEL & 316 STAINLESS STEEL FLANGED BALL VALVE


ANSI 150 & ANSI 300
Firesafe & Anti-static

Features

- Full bore Ball Valves
- Stainless steel
- Flange connections ASME B16.5 RF
- Pressure rating ASME 150#
- DN 1/2" - 8"
- Design ASME B16.34, API 608
- Face to face length ASME B16.10 long pattern
- ISO 5211 Direct Mount
- API 607 5th Edition Fire-Safe certified 5th edition
- TA-Luft (VDI 2440, Sec. 3.3.1.3) certified
- Anti-static / ATEX 94/9/EC (Ex II 2 G-D EX-c II)

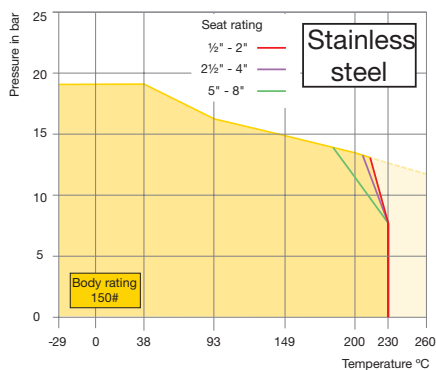

Dimensions (mm)

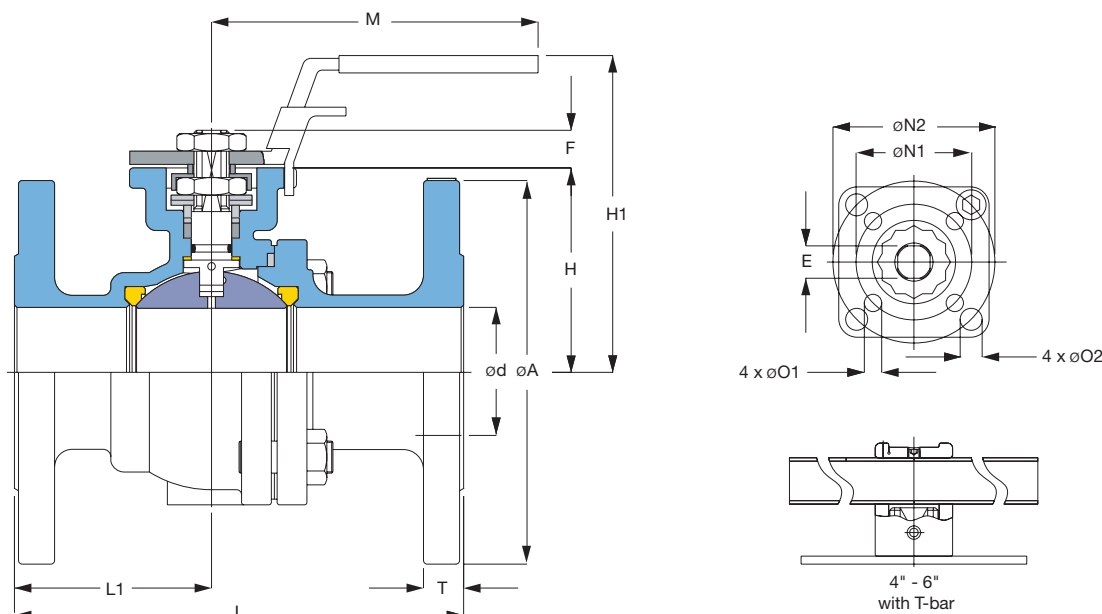

Size	DN	Ød	ØA	#E	F	H	H1	L	L1	M	ØN1	ØN2	ØO1	ØO2	T	m(kg)
1/2"	15	15.0	89.0	9	9	48.0	79.0	108	45.5	145	36	42	6	6	10.5	1.7
3/4"	20	20.0	98.6	9	11	53.0	84.0	117	50.0	145	36	50	6	7	11.2	2.2
1"	25	25.0	108.0	11	11	58.5	90.5	127	54.0	175	42	50	6	7	12.7	2.9
1 1/4"	32	32.0	117.0	11	14	71.0	103.0	140	62.4	175	42	70	6	9	14.2	3.9
1 1/2"	40	38.0	127.0	14	14	76.0	111.0	165	64.0	194	50	70	7	9	15.9	5.9
2"	50	50.0	152.5	14	17	81.0	116.0	178	78.0	194	50	70	7	9	17.5	8.4
2 1/2"	65	63.5	177.8	17	17	101.5	150.0	190	85.0	265	70	102	9	11	19.1	13.4
3"	80	76.0	190.5	17	22	111.5	160.0	203	91.5	265	70	102	9	11	23.9	17.8
4"	100	100.0	228.6	22	27	140.0	182.0	229	108.0	400	-	102	-	11	24.0	30.5
5"	125	125.0	254.0	27	27	183.0	260.0	356	153.0	600	-	125	-	14	25.4	53.5
6"	150	150.0	279.4	27	27	202.0	280.0	394	162.0	800	-	125	-	14	28.5	72.0
8"	200	200.0	342.9	27		252.5	279.5	457	191.0	-	-	125	-	14		131.4

CARBON STEEL & 316 STAINLESS STEEL FLANGED BALL VALVE

**ANSI 150 & ANSI 300
Firesafe & Anti-static**



FLANGED BALL VALVES

Carbon Steel – ANSI 150

Article no.	Size	Valve bore
724504	1/2"	15
724505	3/4"	20
724506	1"	25
724508	1 1/2"	40
724510	2"	50
724514	3"	80
724518	4"	100
724520	6"	150
724521	8"	200

316 Stainless Steel – ANSI 150

Article no.	Size	Valve bore
728504	1/2"	15
728505	3/4"	20
728506	1"	25
728508	1 1/2"	40
728510	2"	50
728514	3"	80
728518	4"	100
728520	6"	150
728521	8"	200

Carbon Steel – ANSI 300

Article no.	Size	Valve bore
725704	1/2"	15
725705	3/4"	20
725706	1"	25
725708	1 1/2"	40
725710	2"	50
725714	3"	80
725718	4"	100
725720	6"	150
725721	8"	200

316 Stainless Steel – ANSI 300

Article no.	Size	Valve bore
729704	1/2"	15
729705	3/4"	20
729706	1"	25
729708	1 1/2"	40
729710	2"	50
729714	3"	80
729718	4"	100
729720	6"	150
729721	8"	200

Limit Switch

Article no.	
suffix LS	1 switch fitted
suffix LS2	2 switches fitted
LS	loose switch
LSB	BRACKET ONLY
SWBOX	Limit Switch Enclosed Box

