




VRSE SINGLE ACTING PILOT CHECK VALVES

350 BAR Rated






Article no.	A	Max Pressure BAR	Max Flow l/min	Price £	Price €
VRSE140	BSPP 1/4	350	15	£34.20	€35.30
VRSE380	BSPP 3/8	350	35	£34.20	€35.30
VRSE120	BSPP 1/2	350	45	£60.70	€62.60
VRSE340	BSPP 3/4	350	70	£112.00	€115.40



Technical Data

Mineral oil	ISO 6743/4 (DIN 51524)
Oil viscosity	15-250 mm ² /s (15 to 250 cSt)
Max contamination index	ISO 4406:1999 Classe 19/17/14
Oil temperature	-20°C +80°C -4°F + 176°F
Ambient temperature	-20°C +50°C -4°F + 122°F
Max leakage	0,015 in ³ /min - 5 drops/min
It is necessary a filter use to protect the valve (advised filtration 15 µm)	

Pressure Drop Graph

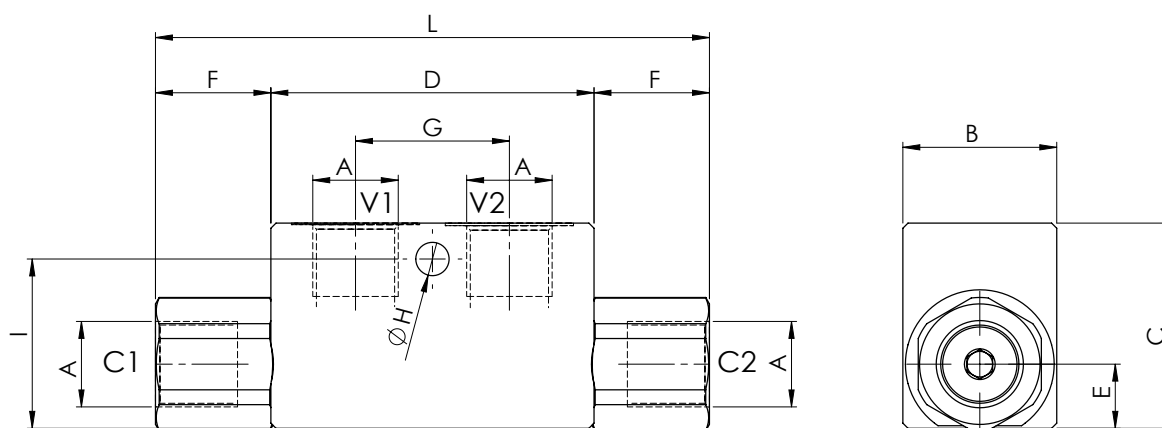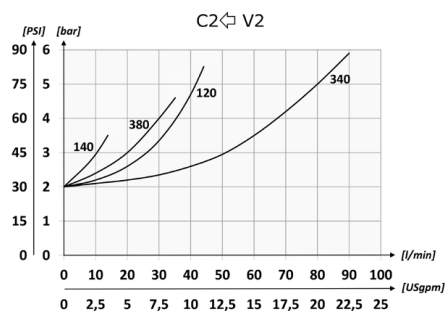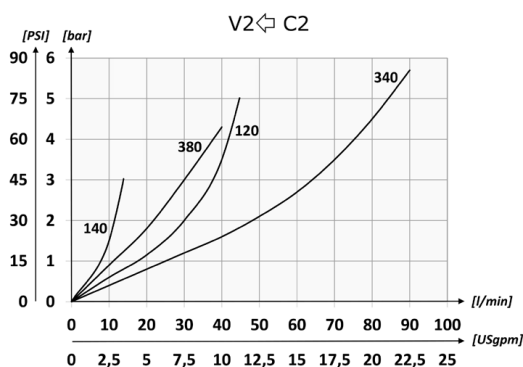

Dimensions (mm)

Code	A	B	C	D	E	F	G	H	I	L	Pilot ratio	Weight kg
VRSE140	BSPP 1/4	30	40	63	12.5	22.5	30	6.5	33	108	1:4	0.64
VRSE380	BSPP 3/8	30	40	63	12.5	22.5	30	6.5	33	108	1:4	0.59
VRSE120	BSPP 1/2	35	50	82	16.5	31.5	36	6.5	35	145	1:4	1.08
VRSE340	BSPP 3/4	40	60	100	22.5	46	50	8.5	50	192	1:2.9	2